


Front end cylinder, eye - eye (spherical bearings)

Part Number

6611751053001

Tipping weight

19-36 ton

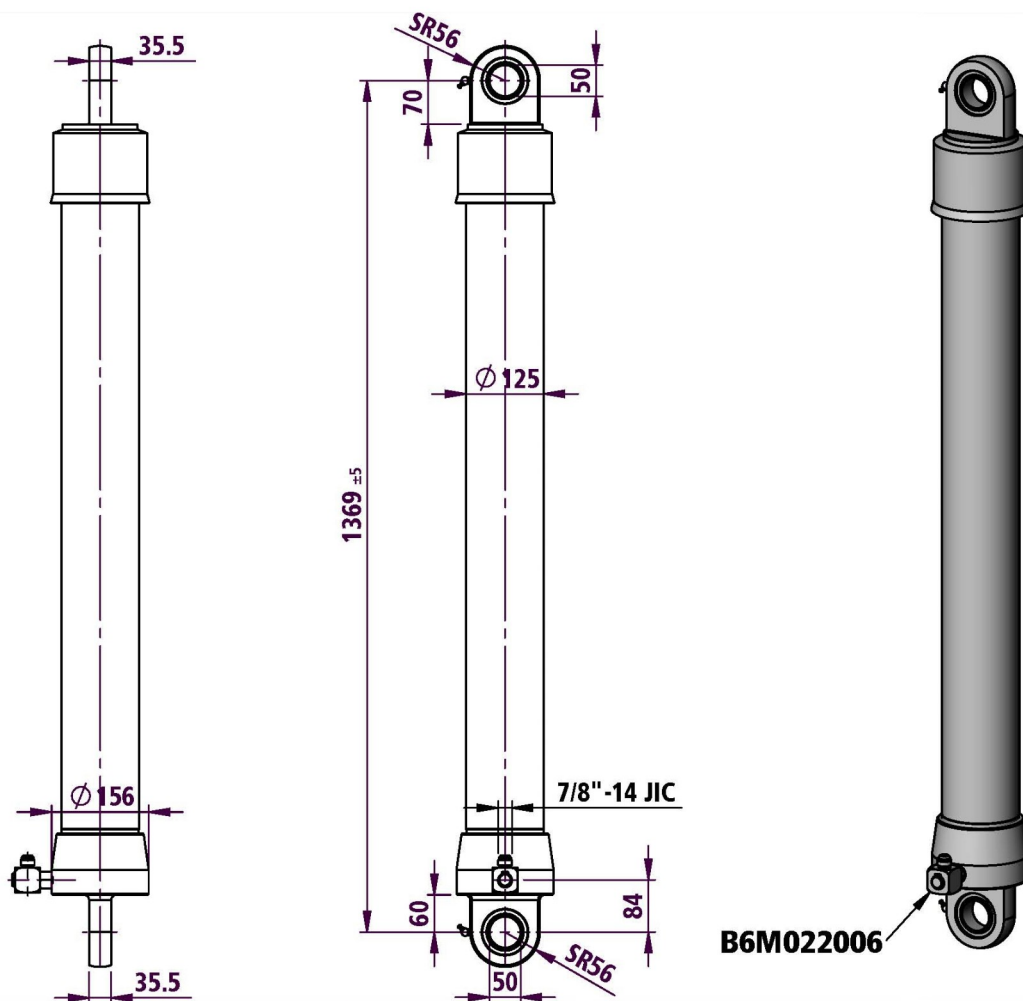

B6M022006

mounting dimension		1369 mm + 20 mm min pull out				total stroke		3005 mm		max pressure		200 bar	
model: FLS 3 105 3005 CRL		code: 6611751053001				weight: 85 kg				1222 000903			
extension	1	2	3	-	-	-	-	-	-	-	-	number of stages: 3	
diameter [mm]	105	90	75	--	--	--	--	--	--	--	--		
stroke [mm]	1002	1002	1001	--	--	--	--	--	--	--	--	total: 3005 mm	
thrust [kN]	173	127	88	--	--	--	--	--	--	--	--		
oil [dm ³]	8.7	6.4	4.4	--	--	--	--	--	--	--	--	total: 19.5 dm ³	

TECHNICAL NOTES AND SPECIFICATIONS

- The normal application of telescopic cylinder is to lift up tipping bodies, loaded with different materials, and consequently discharge this material whilst the cylinder is extended all along its stroke.
- The body weight plus the max payload are the max tipping weight that can be raised by the cylinder. This value, calculated at the max pressure, is a rough indication of the tipping power of the cylinder and must be used as a first criteria for the selection of the cylinder. The real tipping mass can only be calculated by the design engineer of the dump truck, and must take into account the geometry of the dump body and operating conditions. Never exceed the maximum thrust.
- Never exceed maximum pressure.
- The cylinder has been designed for loads along the longitudinal axis: the cylinder is a lifting device only and may not be used as structural member or be subject to side load.
- Chrome coating type CRL (minimum thickness: 5 µm) on rod stage Ø75.
- H.S.PENTA warranty does not apply to any kind of corrosion of coated or non-coated parts. See terms of warranty.
- Maximum extension speed less than 0.2 m/s.
- Hydraulic oil temperature admitted between -40°C and +100°C.
- In case the cylinders must be stored, do not remove the package. Store them in a dry place, not exposed to rain. Do not store the cylinders for more than 6 (six) months.
- Further specifications see mounting instructions, hydraulic oil specification sheet, user & maintenance manual.
- Critical buckling load 196 kN fully extended cylinder.

REMARKS

[2011.11.10] [----.--.--]

REVISIONS

Chromed stages (Steli cromati)

Double lower guide (Doppia guida inferiore)

01

02