


Front end cylinder, eye - eye (spherical bearing)

Part Number **4611751053001**

Tipping weight **19-48 ton**

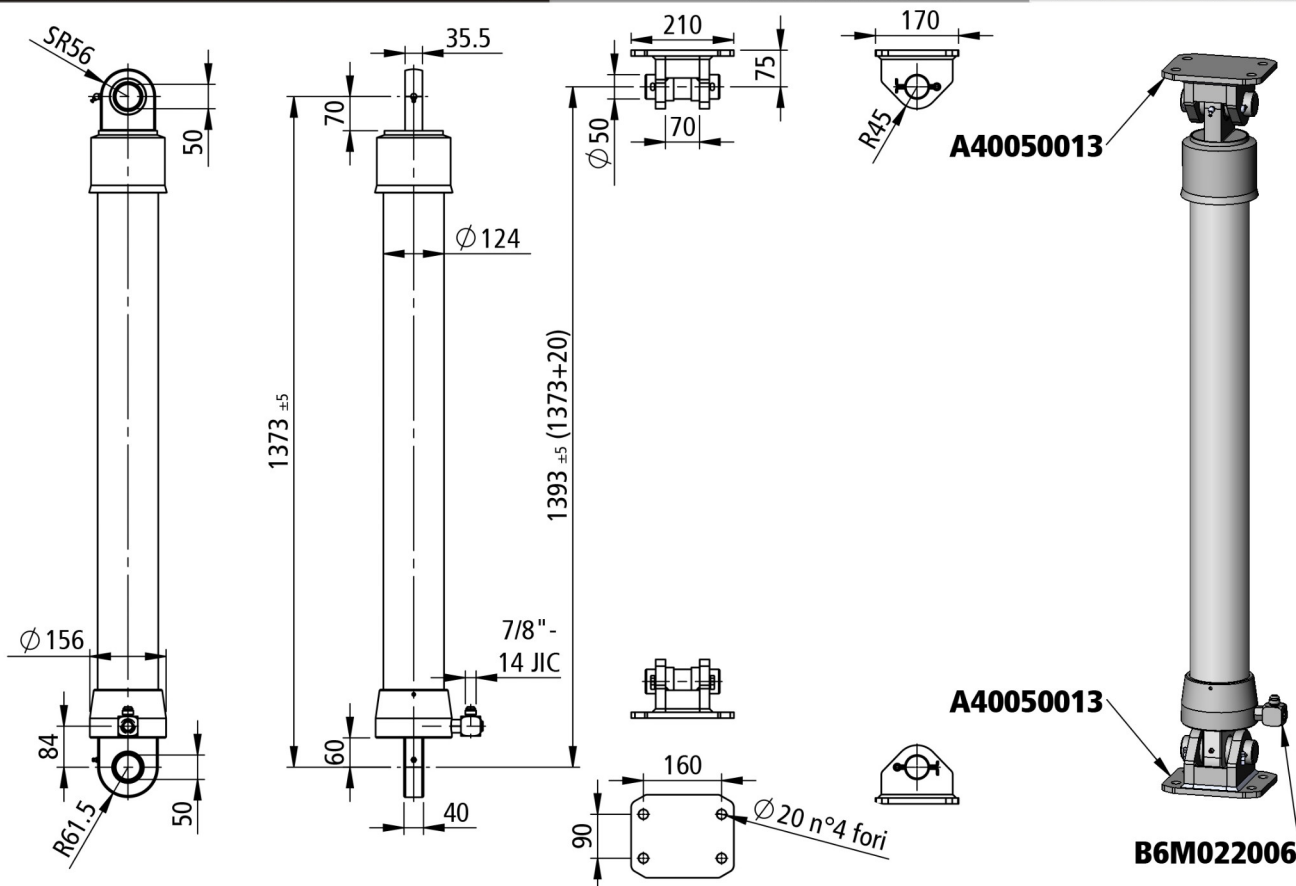

mounting dimension					1373 mm + 20 (-5;+30) mm min pull out					total stroke			2900 mm		max pressure		270 bar	
model: PFS(S) 2900 105 3 CRN					code: 4611751053001					weight: 85 kg			1222 000600					
extension	1	2	3	-	-	-	-	-	-	--	--	number of stages: 3						
diameter [mm]	105	90	75	--	--	--	--	--	--	--	--	total: 2900 mm						
stroke [mm]	968	966	966	--	--	--	--	--	--	--	--	total: 18.8 dm³						
thrust [kN] (200 bar)	173	127	88	--	--	--	--	--	--	--	--							
oil [dm³]	8.4	6.1	4.3	--	--	--	--	--	--	--	--							

TECHNICAL NOTES AND SPECIFICATIONS

User responsibility. Incorrect selection or incorrect use of the here described component and its related items may cause death, personal injury and property damage. All the information here reported are intended for further investigations by users with technical knowledge. The user, as manufacturer of the completed machinery which will incorporate the here described components, is the solely responsible for the final selection of the components. The user must carry out necessary research and tests on components to determine whether, by its design and construction, all performance, endurance, maintenance, safety and warning requirements are met. The user must assure the compliance of the completed machinery with all appropriate laws, directives, norms, industry standards.

The normal application of telescopic cylinder is to lift up tipping bodies, loaded with different materials, and consequently discharge this material whilst the cylinder is extended all along its stroke.

The cylinder has been designed to provide only a linear pushing force. The cylinder is not a structural member and must not be used as a stabilizer or be subject to side or pulling load. The cylinder will not prevent the dump body or trailer from rollover or lateral tilt.

The body weight plus the max payload are the max tipping weight that can be raised by the cylinder. This value, calculated at the max pressure, is a rough indication of the tipping power of the cylinder and must be used as a first criteria for the selection of the cylinder. The real tipping mass can only be calculated by the design engineer of the completed machinery, and must take into account the geometry of the dump body, operating conditions and all reasonably foreseeable uses.

Refer to www.hspenta.it for mounting instructions, bracket details, hydraulic oil specification, user & maintenance, service, general precautions, general guarantee conditions.

Never exceed the herein specified limits of the cylinder.

The ordinary use of telescopic cylinder will not require any coating since the telescopic stages are exposed to atmospheric agents only during the tip-up operation, if duration is below 2 hours. Surface coatings can be supplied on request. H.S.PENTA warranty does not apply to any kind of corrosion of coated or non-coated parts.

When closed, leave the tipping control in descent position. The exposed surface of first moving stage may get rusty, but it will not affect the functionality of the cylinder.

Maximum extension speed less than 0.5 m/s.

Hydraulic oil temperature admitted between -40°C and +100°C.

In case the cylinders must be stored, do not remove the package. Store them in a dry place, not exposed to rain. Do not store the cylinders for more than 6 months.

Critical buckling load 211 kN fully extended cylinder. User shall pay attention to stroke length, loading and cylinder mounting in order to avoid bending or buckling of the cylinder at any position.

Chrome coating type CRN (40 h corrosion test ISO9227-rating 9 ISO10289 - minimum thickness 15 µm) on telescopic stages.

REMARKS

[2006.12.21] [2007.02.05]

Working pressure: 200 bar (Pressione di lavoro: 200 bar)

REVISIONS

2011.11.07 - Modificata pressione massima ed inserto carico critico	02
2013.12.09 - Modificata larghezza sede snodo fondello	03