


5140 Gomito 90° JIC/NPTF

90° connector JIC male X NPTF male

Filettatura / Thread:
NPT (ANSI/ASME B1.20.1-1983)

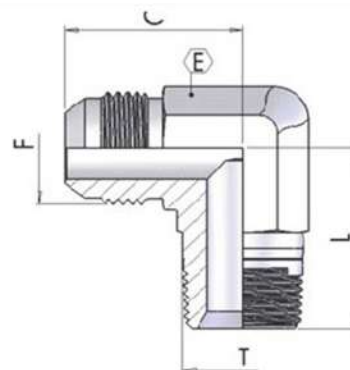


	part number	Ø tube		Dimensions					
		mm	inch	F	T	C	L	E	
○	5140-02-04	6	1/4"	7/16" - 20	1/8"	25	24	14	
○	5140-02-05	8	5/16"	1/2" - 20	1/8"	26	24	14	
○	5140-04-04	6	1/4"	7/16" - 20	1/4"	26	27	14	
○	5140-04-05	8	5/16"	1/2" - 20	1/4"	26	27	14	
○	5140-04-06	10	3/8"	9/16" - 18	1/4"	26	27	14	
○	5140-06-06	10	3/8"	9/16" - 18	3/8"	28	32	19	
○	5140-06-08	12	1/2"	3/4" - 16	3/8"	32	32	19	
○	5140-06-10	14	5/8"	7/8" - 14	3/8"	34	36	22	
○	5140-08-06	10	3/8"	9/16" - 18	1/2"	29	36	22	
●	5140-08-08	12	1/2"	3/4" - 16	1/2"	34	36	22	
○	5140-08-10	15	5/8"	7/8" - 14	1/2"	34	36	22	
○	5140-08-12	18	3/4"	1.1/16" - 12	1/2"	40	42	27	
○	5140-12-08	12	1/2"	3/4" - 16	3/4"	36	40	27	
○	5140-12-10	16	5/8"	7/8" - 14	3/4"	39	43	27	
●	5140-12-12	20	3/4"	1.1/16" - 12	3/4"	40	43	27	
○	5140-12-16	25	1"	1.5/16" - 12	3/4"	42	42	33	
○	5140-16-16	25	1"	1.5/16" - 12	1"	42	42	33	
○	5140-16-20	32	1.1/4"	1.5/8" - 12	1"	56	57	44	
○	5140-20-20	32	1.1/4"	1.5/8" - 12	1-1/4"	56	59	44	
○	5140-24-24	38	1.1/2"	1.7/8" - 12	1-1/2"	62	62	50	
○	5140-32-32	50	2"	2.1/2" - 12	2"	74	74	65	

5160 T con maschio NPTF laterale

NPTF male Run Tee

Filettatura / Thread:
NPT (ANSI/ASME B1.20.1-1983)

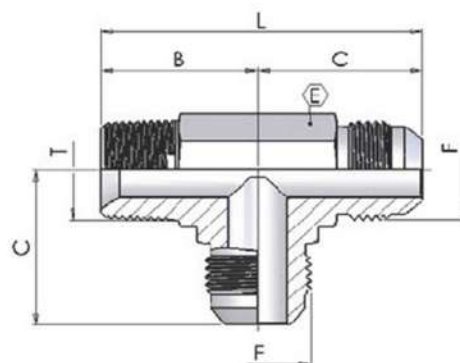

	part number	Ø tube		Dimensions						
		mm	inch	F	T	C	L	B	E	
○	5160-02-04	6	1/4"	7/16" - 20	1/8"	23	43	20	14	
○	5160-04-04	6	1/4"	7/16" - 20	1/4"	26	52	26	14	
○	5160-04-05	8	5/16"	1/2" - 20	1/4"	24	51	27	14	
○	5160-04-06	10	3/8"	9/16" - 18	1/4"	27	55	28	14	
○	5160-06-08	12	1/2"	3/4" - 16	3/8"	32	63	31	19	
○	5160-08-10	16	5/8"	7/8" - 14	1/2"	37	74	37	22	
○	5160-12-12	20	3/4"	1.1/16" - 12	3/4"	42	82	40	27	
○	5160-16-16	25	1"	1.5/16" - 12	1"	46	92	45,5	32	