


5150 Gomito 45° JIC/NPTF

45° connector JIC male X NPTF male

Filettatura / Thread:
NPT (ANSI/ASME B1.20.1-1983)

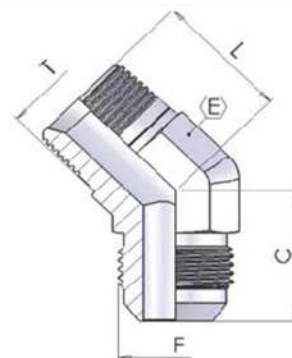


	part number	Ø tube		Dimensions					
		mm	inch	F	T	C	L	E	
○	5150-02-04	6	1/4"	7/16" - 20	1/8"	20	18	14	
○	5150-02-05	8	5/16"	1/2" - 20	1/8"	22	20	14	
○	5150-04-04	6	1/4"	7/16" - 20	1/4"	21	20	14	
○	5150-04-05	8	5/16"	1/2" - 20	1/4"	20	20	14	
○	5150-04-06	10	3/8"	9/16" - 18	1/4"	22	23	19	
○	5150-06-06	10	3/8"	9/16" - 18	3/8"	22	23	19	
○	5150-06-08	12	1/2"	3/4" - 16	3/8"	27	23	22	
○	5150-06-10	14	5/8"	7/8" - 14	3/8"	29	23	22	
○	5150-08-06	10	3/8"	9/16" - 18	1/2"	22	28	22	
●	5150-08-08	12	1/2"	3/4" - 16	1/2"	27	28	22	
○	5150-08-10	15	5/8"	7/8" - 14	1/2"	32	32	27	
○	5150-08-12	18	3/4"	1.1/16" - 12	1/2"	35	32	27	
○	5150-12-08	12	1/2"	3/4" - 16	3/4"	30	32	27	
○	5150-12-10	16	5/8"	7/8" - 14	3/4"	29	29	27	
○	5150-12-12	20	3/4"	1.1/16" - 12	3/4"	33	32	27	
○	5150-12-16	25	1"	1.5/16" - 12	3/4"	29	29	35	
○	5150-16-16	25	1"	1.5/16" - 12	1"	37	38	35	
○	5150-16-20	32	1.1/4"	1.5/8" - 12	1"	42	43	44	
○	5150-20-20	32	1.1/4"	1.5/8" - 12	1-1/4"	42	43	44	
○	5150-24-24	38	1.1/2"	1.7/8" - 12	1-1/2"	44	43	50	
○	5150-32-32	50	2"	2.1/2" - 12	2"	53	52	65	70

5170 T con maschio NPTF centrale

NPTF male branch Tee

Filettatura / Thread:
NPT (ANSI/ASME B1.20.1-1983)

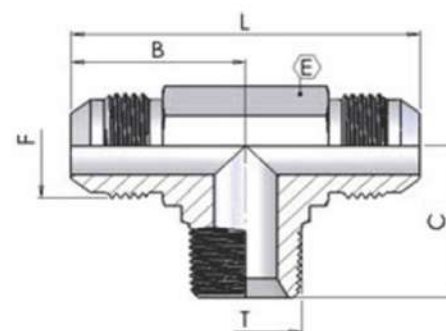

	part number	Ø tube		Dimensions					
		mm	inch	F	T	C	L	B	E
○	5170-02-04	6	1/4"	7/16" - 20	1/8"	20	46	23	14
○	5170-04-04	6	1/4"	7/16" - 20	1/4"	26	52	26	14
○	5170-04-05	8	5/16"	1/2" - 20	1/4"	26	52	26	14
○	5170-04-06	10	3/8"	9/16" - 18	1/4"	28	54	27	14
○	5170-06-08	12	1/2"	3/4" - 16	3/8"	31	64	32	19
○	5170-08-10	16	5/8"	7/8" - 14	1/2"	37	74	37	22
○	5170-12-12	20	3/4"	1.1/16" - 12	3/4"	40	84	42	27
○	5170-16-16	25	1"	1.5/16" - 12	1"	50	92	46	35