


5200 Gomito 45° orientabile JIC/UNF

45° elbow "adjustable" connector JIC male X
UNF straight thread male

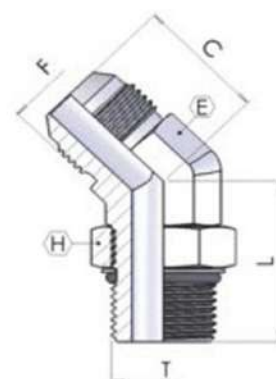


Filettatura / Thread:
UNF/UN (ISO 11926-1)

	part number	Ø tube		Dimensions						
		mm	inch	F	T	C	L	H	E	
●	5200-04	6	1/4"	7/16" - 20	7/16" - 20	19	27	14	11	
○	5200-05	8	5/16"	1/2" - 20	1/2" - 20	22	29	17	14	
●	5200-06	10	3/8"	9/16" - 18	9/16" - 18	22	29	17	14	
○	5200-08	12	1/2"	3/4" - 16	3/4" - 16	26	33	22	19	
○	5200-10	16	5/8"	7/8" - 14	7/8" - 14	30	39	25	22	
○	5200-12	20	3/4"	1.1/16" - 12	1.1/16" - 12	33	44	32	27	
○	5200-16	25	1"	1.5/16" - 12	1.5/16" - 12	39	47	38	35	
○	5200-20	32	1.1/4"	1.5/8" - 12	1.5/8" - 12	40	49	48	43	

5210 T con maschio UNF laterale orientabile

Adjustable UNF male run Tee

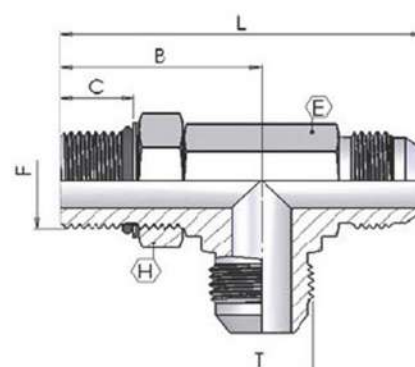

Filettatura / Thread:
UNF/UN (ISO 11926-1)

	part number	Ø tube		Dimensions						
		mm	inch	F	T	C	L	B	E	
○	5210-04	6	1/4"	7/16" - 20	7/16" - 20	10	49	26	11	
○	5210-05	8	5/16"	1/2" - 20	1/2" - 20	11	52	28	13	
○	5210-06	10	3/8"	9/16" - 18	9/16" - 18	11	59	32	14	
●	5210-08	12	1/2"	3/4" - 16	3/4" - 16	13	69	37	19	
○	5210-10	16	5/8"	7/8" - 14	7/8" - 14	14	80	43	22	
○	5210-12	20	3/4"	1.1/16" - 12	1.1/16" - 12	17	91	49	27	
●	5210-16	25	1"	1.5/16" - 12	1.5/16" - 12	17	98	52	33	