


1907 Nipplo maschio Jic/UNF

Male connector JIC male X UNF straight thread

Filettatura / Thread:
UNF/UN (ISO 11926-1)




	part number	Ø tube		Dimensions						
		mm	inch	F	T	C	L	B	E	
●	1907-04-04	6	1/4"	7/16" - 20	7/16" - 20	14	31	9	14	
○	1907-04-05	6	1/4"	7/16" - 20	1/2" - 20	14	31	9	17	
○	1907-04-06	6	1/4"	7/16" - 20	9/16" - 18	14	32	10	17	
○	1907-05-05	8	5/16"	1/2" - 20	1/2" - 20	14	31	9	17	
○	1907-05-08	8	5/16"	1/2" - 20	3/4" - 14	14	35	11	22	
●	1907-06-06	10	3/8"	9/16" - 18	9/16" - 18	14	33	10	17	
●	1907-06-08	10	3/8"	9/16" - 18	3/4" - 14	14	35	11	22	
○	1907-08-08	12	1/2"	3/4" - 14	3/4" - 14	17	38	11	22	
●	1907-08-10	12	1/2"	3/4" - 14	7/8" - 14	17	39	13	27	
○	1907-10-08	14	5/8"	7/8" - 14	3/4" - 14	19	38	11	24	
○	1907-10-10	15	5/8"	7/8" - 14	7/8" - 14	19	43	13	27	
○	1907-10-12	16	5/8"	7/8" - 14	1.1/16" - 12	19	47	15	32	
●	1907-12-10	20	3/4"	1.1/16" - 12	7/8" - 14	22	46	13	27	
●	1907-12-12	20	3/4"	1.1/16" - 12	1.1/16" - 12	22	50	15	32	
○	1907-12-16	20	3/4"	1.1/16" - 12	1.5/16" - 12	22	51	15	38	
○	1907-16-12	25	1"	1.5/16" - 12	1.1/16" - 12	23	51	15	34	
●	1907-16-16	25	1"	1.5/16" - 12	1.5/16" - 12	23	52	15	38	
●	1907-20-20	32	1.1/4"	1.5/8" - 12	1.5/8" - 12	24	55	15	50	
○	1907-24-24	38	1.1/2"	1.7/8" - 12	1.7/8" - 12	28	60	15	55	

5190 Gomito 90° orientabile JIC/UNF

90° elbow "adjustable" connector JIC male X UNF straight thread male

Filettatura / Thread:
UNF/UN (ISO 11926-1)

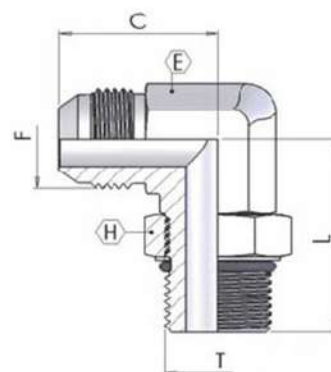

	part number	Ø tube		Dimensions						
		mm	inch	F	T	C	L	H	E	
●	5190-04	6	1/4"	7/16" - 20	7/16" - 20	24	26	14	11	
●	5190-05	8	5/16"	1/2" - 20	1/2" - 20	26	32	17	14	
●	5190-06	10	3/8"	9/16" - 18	9/16" - 18	26	32	17	14	
●	5190-08	12	1/2"	3/4" - 16	3/4" - 16	31	37	22	19	
●	5190-10	16	5/8"	7/8" - 14	7/8" - 14	35	43	25	22	
○	5190-12	20	3/4"	1.1/16" - 12	1.1/16" - 12	41	49	32	27	
○	5190-16	25	1"	1.5/16" - 12	1.5/16" - 12	47	52	38	35	
○	5190-20	32	1.1/4"	1.5/8" - 12	1.5/8" - 12	57	57	48	43	