


5056 Riduzione M/F Jic


Swivel Reduction M/F JIC

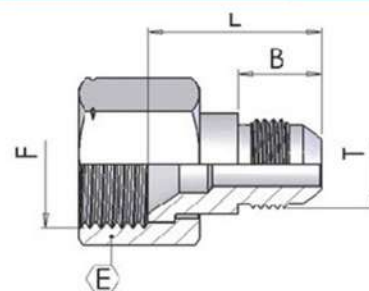

	part number	Ø tube		Dimensions					
		mm	inch	F	T	B	L	E	
○	5056-06-04	10	3/8"	9/16" - 18	7/16" - 20	14	23	19	
○	5056-06-05	10	3/8"	9/16" - 18	1/2" - 20	14	23	19	
○	5056-08-04	12	1/2"	3/4" - 16	7/16" - 20	14	24	22	
○	5056-08-05	12	1/2"	3/4" - 16	1/2" - 20	14	24	22	
○	5056-08-06	12	1/2"	3/4" - 16	9/16" - 18	14	24	22	
○	5056-10-04	16	5/8"	7/8" - 14	7/16" - 20	14	25	27	
○	5056-10-06	16	5/8"	7/8" - 14	9/16" - 18	14	25	27	
◐	5056-10-08	16	5/8"	7/8" - 14	3/4" - 16	17	28	27	
○	5056-12-04	20	3/4"	1.1/16" - 12	7/16" - 20	14	27	32	
○	5056-12-06	20	3/4"	1.1/16" - 12	9/16" - 18	14	27	32	
○	5056-12-08	20	3/4"	1.1/16" - 12	3/4" - 16	17	30	32	
◐	5056-12-10	20	3/4"	1.1/16" - 12	7/8" - 14	19	32	32	
○	5056-16-10	25	1"	1.5/16" - 12	7/8" - 14	19	34	41	
◐	5056-16-12	25	1"	1.5/16" - 12	1.1/16" - 12	22	36	41	
○	5056-20-12	32	1.1/4"	1.5/8" - 12	1.1/16" - 12	22	39	50	
○	5056-20-16	32	1.1/4"	1.5/8" - 12	1.5/16" - 12	23	40	50	
○	5056-24-12	38	1.1/2"	1.7/8" - 12	1.1/16" - 12	22	41	60	
○	5056-24-16	38	1.1/2"	1.7/8" - 12	1.5/16" - 12	23	42	60	
○	5056-24-20	38	1.1/2"	1.7/8" - 12	1.5/8" - 12	24	43	60	

5060 Gomito 90° maschio/femm. girevole JIC

90° connector swivel JIC female X JIC male

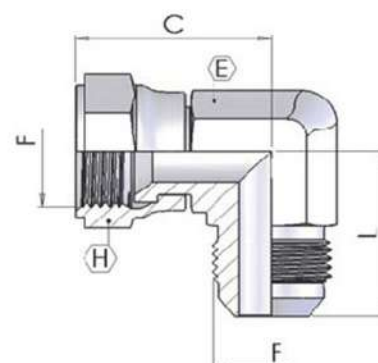

	part number	Ø tube		Dimensions						
		mm	inch	F	T	C	L	H	E	
●	5060-04	6	1/4"	7/16" - 20	7/16" - 20	26	23	16	14	
◐	5060-05	8	5/16"	1/2" - 20	1/2" - 20	29	26	16	14	
●	5060-06	10	3/8"	9/16" - 18	9/16" - 18	32	26	19	14	
●	5060-08	12	1/2"	3/4" - 16	3/4" - 16	35	32	24	19	
●	5060-10	16	5/8"	7/8" - 14	7/8" - 14	41	36	27	22	
●	5060-12	20	3/4"	1.1/16" - 12	1.1/16" - 12	44	40	32	27	
●	5060-16	25	1"	1.5/16" - 12	1.5/16" - 12	50	42	38	34	
◐	5060-20	32	1.1/4"	1.5/8" - 12	1.5/8" - 12	59	52	50	41	
◐	5060-24	38	1.1/2"	1.7/8" - 12	1.7/8" - 12	66	59	60	48	
○	5060-32	50	2"	2.1/2" - 12	2.1/2" - 12	78	85	66	70	