


5220 T con maschio UNF centrale orientabile

Adjustable UNF male branch Tee

Filettatura / Thread:
UNF/UN (ISO 11926-1)

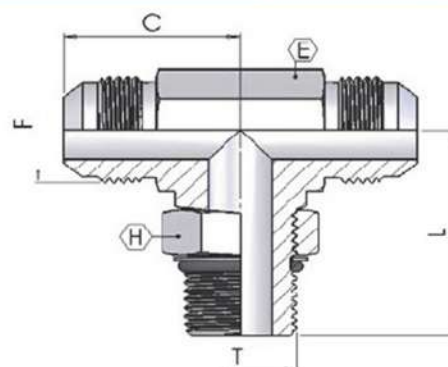


	part number	Ø tube		Dimensions						
		mm	inch	F	T	C	L	H	E	
○	5220-04	6	1/4"	7/16" - 20	7/16" - 20	23	26	14	11	
○	5220-05	8	5/16"	1/2" - 20	1/2" - 20	24	28	16	13	
○	5220-06	10	3/8"	9/16" - 18	9/16" - 18	27	32	17	14	
○	5220-08	12	1/2"	3/4" - 16	3/4" - 16	32	37	22	19	
○	5220-10	16	5/8"	7/8" - 14	7/8" - 14	37	43	27	22	
○	5220-12	20	3/4"	1.1/16" - 12	1.1/16" - 12	42	49	32	27	
●	5220-16	25	1"	1.5/16" - 12	1.5/16" - 12	46	52	38	33	

1905 Nipplo maschio BSP/JIC

Connector BSP parallel thread male X JIC male

Filettatura / Thread:
BSPP (Form A DIN 3852)



	part number	Ø tube		Dimensions						
		mm	inch	F	T	C	L	B	E	
○	1905-02-04	6	1/4"	7/16" - 20	1/8"	14	29	8	14	
●	1905-04-04	6	1/4"	7/16" - 20	1/4"	14	34	12	19	
○	1905-04-05	8	5/16"	1/2" - 20	1/4"	14	34	12	19	
●	1905-04-06	10	3/8"	9/16" - 18	1/4"	14	34	12	19	
○	1905-06-05	8	5/16"	1/2" - 20	3/8"	14	36	12	22	
●	1905-06-06	10	3/8"	9/16" - 18	3/8"	14	36	12	22	
●	1905-06-08	12	1/2"	3/4" - 16	3/8"	17	38	12	22	
●	1905-06-10	14	5/8"	7/8" - 14	3/8"	19	42	12	24	
○	1905-08-06	10	3/8"	9/16" - 18	1/2"	14	39	14	27	
●	1905-08-08	12	1/2"	3/4" - 16	1/2"	17	42	14	27	
●	1905-08-10	15	5/8"	7/8" - 14	1/2"	19	44	14	27	
●	1905-08-12	20	3/4"	1.1/16" - 12	1/2"	22	47	14	27	
○	1905-10-10	14	5/8"	7/8" - 14	5/8"	19	46	16	30	
○	1905-10-12	14	5/8"	1.1/16" - 12	5/8"	22	49	16	30	
●	1905-12-10	14	5/8"	7/8" - 14	3/4"	19	46	16	32	
●	1905-12-12	20	3/4"	1.1/16" - 12	3/4"	22	49	16	32	
○	1905-12-16	25	1"	1.5/16" - 12	3/4"	23	52	16	34	
○	1905-16-12	20	3/4"	1.1/16" - 12	1"	22	52	18	41	
●	1905-16-16	25	1"	1.5/16" - 12	1"	23	54	18	41	
○	1905-16-20	32	1.1/4"	1.5/8" - 12	1"	24	57	18	42	
●	1905-20-20	32	1.1/4"	1.5/8" - 12	1.1/4"	24	58	20	50	
○	1905-24-20	32	1.1/4"	1.5/8" - 12	1.1/2"	24	59	22	55	
○	1905-24-24	38	1.1/2"	1.7/8" - 12	1.1/2"	28	63	22	55	